

PRODUCT SPECIFICATION

CONNECT


IT

EUROLAN Coppercable C6A S/FTP Cca



Ordering information

Part number	E-number	Description
19Cca-SA-23WT-R500	4903425	EuroLAN C6A 4 pair S/FTP LSZH Cca 500m/reel

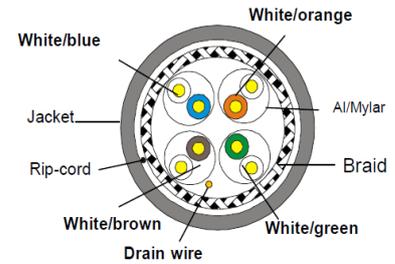


Construction	
Conductor	Bare copper wire \varnothing 0,56 mm (AWG23)
Insulation	Skin-foam-skin Polyethylene, \varnothing 1.33 \pm 0,05 mm
Twisting	2 cores to the pair
Pair screen	Al/Mylar
Outer screen	Tinned copper 0,10mm coverage \geq 30%
Cable lay up	4 pairs (PIMF) to the core
Sheath	0,55 \pm 0,05 mm FR-LSZH (complies RoHS)
Outer diameter	\varnothing 7,5 \pm 0,5mm
Ripcord	Yes
Weight kg/km	54
Nominal Velocity of propagation (NVP)	74%
Sheath physical properties Aging period 100°Cx24hx7d	Before aging Tensile strength (MPa) \geq 10,0
	Before aging Elongation (%) \geq 125
	After aging Tensile strength (MPa) \geq 8,0
Impedance (Ω)	1,0-250,0 MHz 100 \pm 15
	250-500,0 MHz 100 \pm 22
Delay Skew	1,0-500,0 MHz (ns/100m) \leq 45
Unbalanced to ground capacitance	Max 330 Ω /100m
DC resistance	Ω /100m max 9,38
DC Conductor resistance unbalanced (%)	Max 5,0



- Verified for high-speed applications up to 500 MHz (10Gbit Ethernet)
- **Application:**
Primary (campus), Secondary (riser), Tertiary (horizontal)
IEEE 802.3:
10/100/1000/10000/10GBaseT
IEEE 802.5 16MB; ISDN; TPDDI;
ATM
Power over Ethernet (PoE):
4PPoE 100W
- **Standards:**
ANSI/TIA-568.2-D
ISO/IEC 11801 2nd ed;
IEC 61156-5 EN 50173-1;
EN 50288-10; IEEE 802.3af
- **Fire rating:**
EN 50399: Class **Cca s1,d1,a1** EN
-50575:2014+A1:2016
LSZH: IEC 60332-1; IEC 60754-2;
IEC 61034

PRODUCT SPECIFICATION

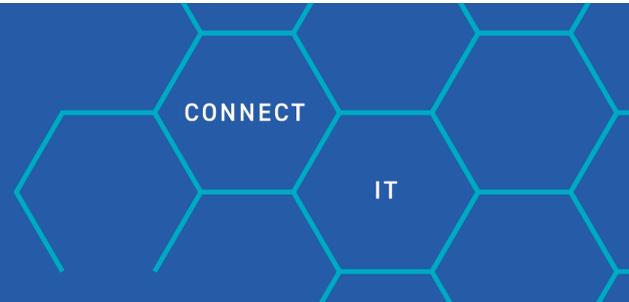

EUROLAN Coppercable C6A S/FTP Cca

Mechanical Properties		
Bending radius	Installation	8 x OD
	Installed	4 x OD
Temperature range	During operation	-20°C to + 60°C
	During installation	0°C to + 50°C

Technical Performance (100m)							
Frequency (MHz)	RL »dB	ATT «dB	NEXT »dB	DELAY «ns/100M	PSNEXT »dB	ELFEXT »dB	PSELFEXT »dB
1	20,0		74,3	570,0	72,3	67,8	64,8
4,0	23,0	3,8	65,3	552,0	63,3	55,8	52,8
8,0	24,5	5,3	60,8	546,7	58,8	49,7	46,7
10,0	25,0	5,9	59,3	545,4	57,3	47,8	44,8
16,0	25,0	7,5	56,2	543,0	54,2	43,7	40,7
20,0	25,0	8,4	54,8	542,1	52,8	41,8	38,8
25,0	24,3	9,4	53,3	541,2	51,3	39,8	36,8
31,25	23,6	10,5	51,9	540,4	49,9	37,9	34,9
62,5	21,5	15,0	47,4	538,6	45,4	31,9	28,9
100	20,1	19,1	44,3	537,6	42,3	27,8	24,8
200	18,0	27,6	39,8	536,5	37,8	21,8	18,8
250	17,3	31,1	38,3	536,3	36,3	19,8	16,8
300	16,8	34,3	37,1	536,1	35,1	18,3	15,3
500	15,2	45,3	33,8	535,6	31,8	13,8	10,8