


PRODUKTSPECIFIKATION

Glasfiberstag 20 mm – stagets hållfasthet

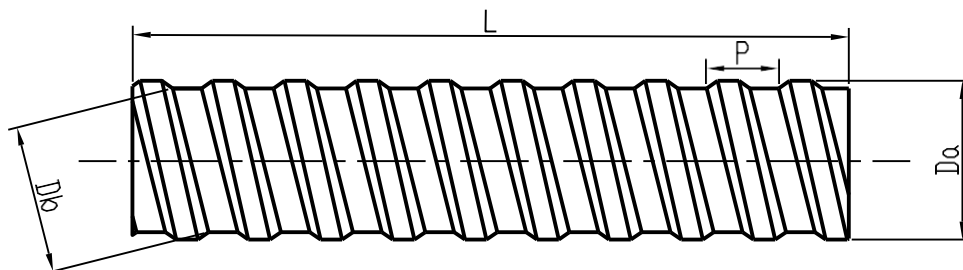

Item	Unit	Standard specification
Breaking load	kN	200
Effective cross section	mm ²	200
Tensile strength in core	N/mm ²	1000
Tensile E-modulus	N/mm ²	45,000
Bending strength	N/mm ²	400
Shear strenght	N/mm ²	460
Strain in failure	%	2.5
Torsion	N.m	50
Weight	g/m	650-700
Pitch (p)	mm	10.0±0,2
Dia,Top (Da)	mm	22.0±0.5
Dia,Deep (Db)	mm	19.6±0.5
Head part	60°/90°	(订) 60°
Length	mm	L (订) +10+0